

Powerful
Robust
Quiet

LE-450

Delivers **real power** in
everyday winds



Designed &
manufactured
in the UK

marine & industrial off-grid

LE-450 Features



LE-450

The **most powerful turbine** on the market today for its size

High outputs

105W at 8m/s (17.8mph), 450W max

Power in everyday winds

In the cruising winds of 8 - 15 knots, 4 - 8m/s on land

Excellent value for money

Delivers the highest output for the lowest cost

Easy to install

Perfect where space is at a premium - yachts, telecoms towers and CCTV stations.

Robust

Designed for extreme environments

Quiet

Quieter than the competition

Appreciated for being quiet thanks to our Whispower™ blade design


The LE-450 is the most powerful turbine of its size, able to provide meaningful power at everyday wind speeds, whilst being tough and robust enough to withstand storm force winds.

By fine tuning the characteristics of the alternator to work in perfect harmony with the operating parameters of the rotor blades, the turbine can extract the right amount of torque, at the right RPM at a given wind speed, delivering a superbly efficient transfer of power from the wind.


The LE-450's modular design and ease of maintenance means it could easily run for 20 years.

Using a passive aerodynamic design, the LE-450 limits its RPM during high winds which means it won't spin out of control, it won't over-heat and it will survive destructive winds. It is marine quality finished - the aluminium alloy chassis and stainless steel components are protected from the elements with aerospace grade coatings and anodising.

LE-450 Technical Overview

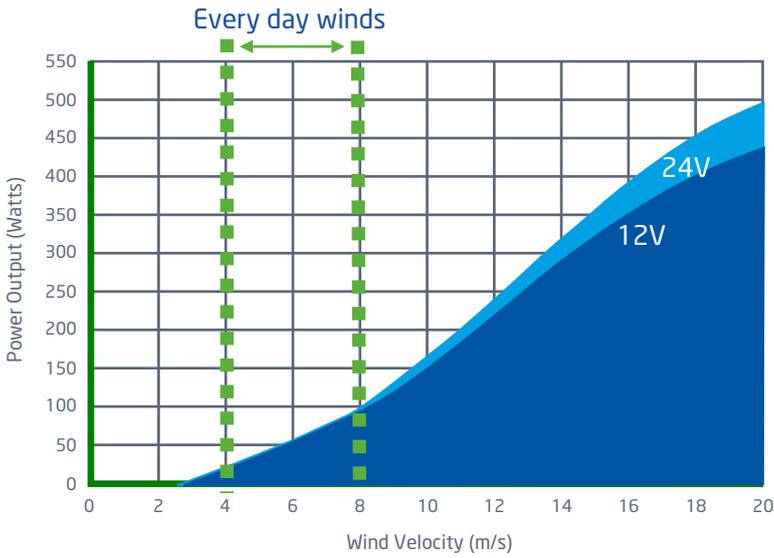

- Rotor diameter** - 1 metre
- Rotor Type** - 5-Blade upwind
- Blade Material** - Glass Reinforced, UV resistant Nylon
- Rated output** - 105W at 8m/s (18mph, 15.5knots)
- Peak output** - 450W
- Cut-in speed** - 3m/s (6.7mph, 6knots)
- Cut-out speed** - None
- Weight** - 8Kg
- Voltages** - 12V, 24V, 48V DC, Grid-tie
- Warranty** - 2 years

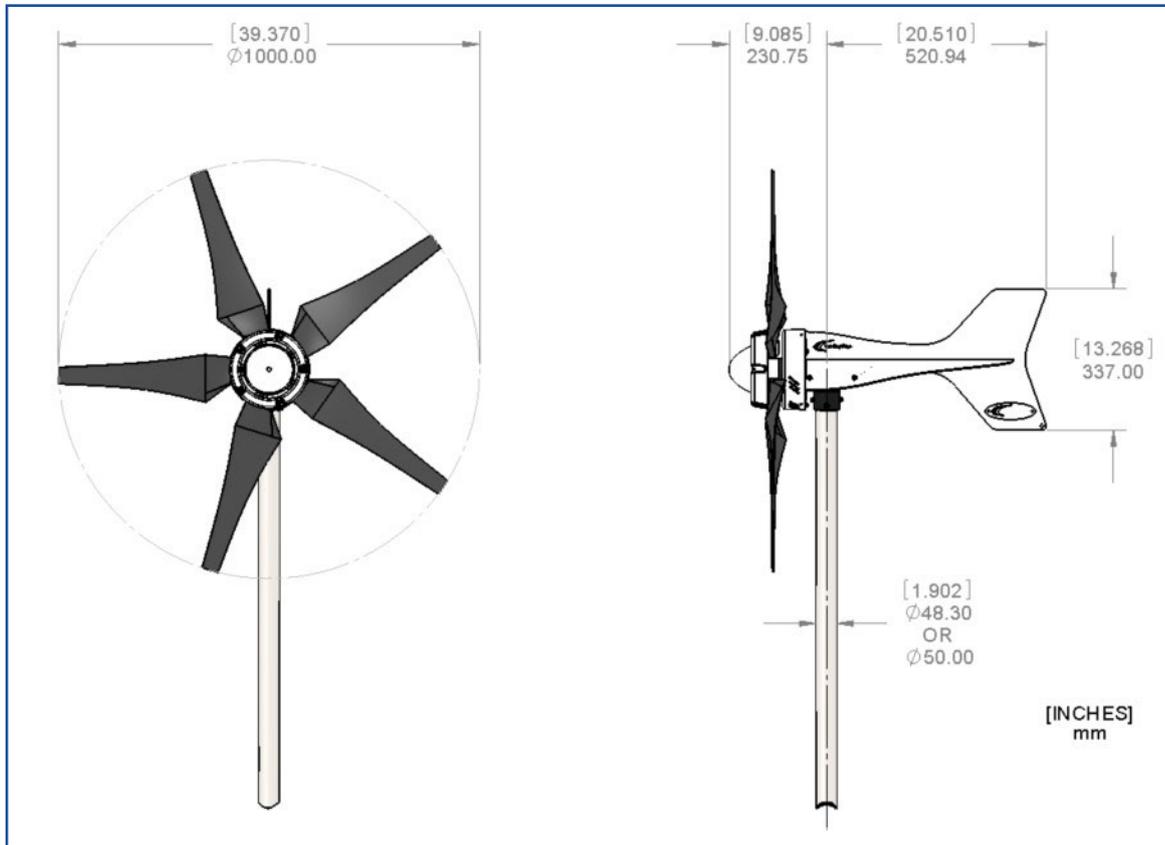

Rotational speed - 0-2000 rpm

Swept area - 0.785m²

Tip speed ratio - 6

Typical noise level - 6dB(A) above background

Alternator type - Direct drive, axial flux, 8 pole permanent magnet generator

Design - 3-phase AC with rectification

Mounting - 48.3mm/50mm outer diameter pole

Materials - Aluminium alloy chassis, aerospace grade surface finish, epoxy coated stator coils, sealed for life bearings

Control system - Stall regulation

Brake system - Electromagnetic braking switch

Yaw system - Heavy duty slip ring assembly, 1043mm turning circle

LE-450 Applications



- Marine
- Security
- Telecommunications
- LED Lighting systems
- Road signage
- Off-shore
- Telemetry

Our LE-450 horizontal axis turbine addresses the increasing demand for power on small scale off-grid renewable energy systems and grid connected applications. It is as much at home on land as on the water in a variety of applications.

Wind turbine performance is subject to many factors. All output data contained in this document is indicative and actual turbine outputs will depend on the prevailing site and installation conditions.

VANNHANDEL.NO

www.vannhandel.no
post@vannhandel.no
Postboks 1261
N-3254 LARVIK, NORGE
Telefon/SMS: +47-90609695
www.youtube.com/vannhandel
www.facebook.com/vannhandel

Ring
90609695
for spørsmål
og tilbud



Leading Edge Turbines
Skyrrid Farm | Pontrilas
Herefordshire | HR2 0BW | UK

0845 652 0396 | info@leturbines.com
Copyright © 2013 Leading Edge Turbines